

PLAN

NOTES:


BRICK MASONRY CAN BE COMMON CLAY BRICK, JUMBO BRICK, OR CONCRETE BRICK.

CONCRETE BOTTOMS SHALL BE PAID AS BRICK MASONRY.

ALL MORTAR JOINTS ARE TO BE $1/2'' \pm 1/8''$.

CONCRETE COVER TO BE PAID FOR UNDER THE PAY ITEM 4'X4' PRECAST CONCRETE YARD INLET COVER.

FOR DEPTHS OVER 4'-0" USE STEPS ON 16" CENTERS. STEPS SHALL BE IN ACCORDANCE WITH COG STD. #414.

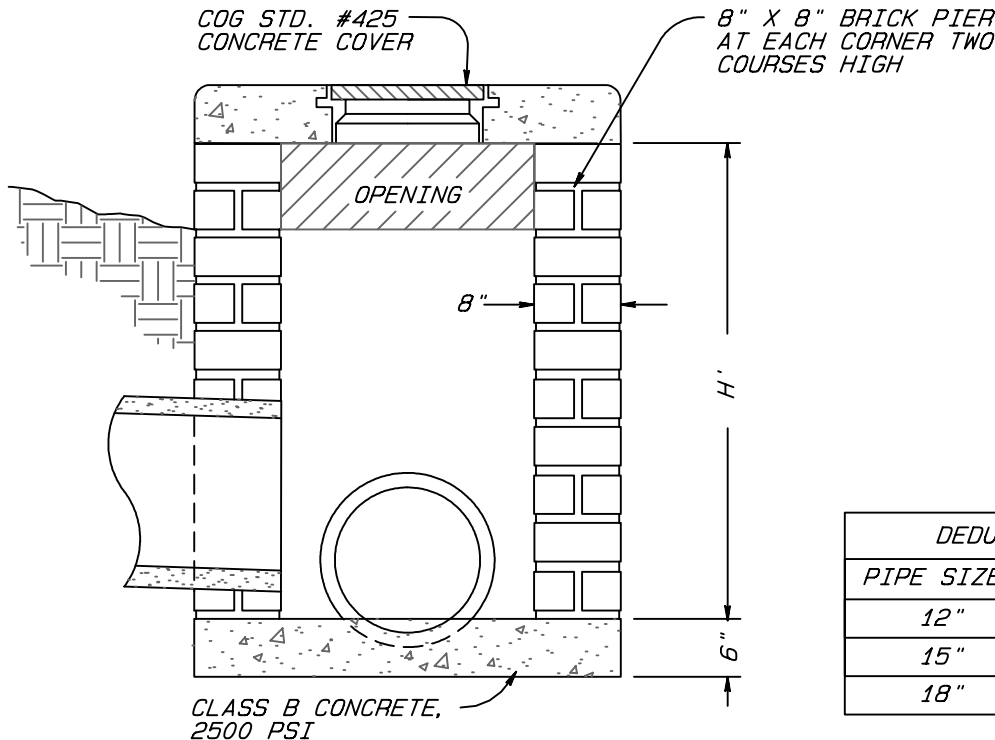

SECTION A-A

DEDUCTIONS FOR ONE PIPE		
PIPE SIZE	C.M.	R.C.
12"	0.020	0.032
15"	0.031	0.047
18"	0.044	0.065

QUANTITIES		
BASE (C. Y.)	H (PER FT. HEIGHT)	PIERS (C. Y. EACH)
0.296	0.330	0.006

CITY OF GREENSBORO

**STANDARD 4' X 4' BRICK
MASONRY YARD INLET**

STD. NO.

424

REV.

08-02